



DOSATRON®

WATER POWERED DOSING TECHNOLOGY

14 GPM: D14MZ5

PRODUCT DESCRIPTION

The versatile Dosatron D14MZ5-14 GPM is used in industries such as metal processing, food safety & sanitation, carwash, and printing. Is simple to install with the Industrial Plumbing Kit (IPK34-14GPM) and is easy to maintain.

PRODUCT SPECIFICATIONS

Dilution Range:	1:200 to 1:20 (0.5% to 5%)
Water Flow Range:	0.05 to 14 GPM
Operating Pressure Range:	4.3 to 85 PSI
Available Housing Materials:	<ul style="list-style-type: none"> • Polypropylene (Standard Blue) • PVDF (White)
Other Options:	Viscous
Dimensions:	19 1/18" x 6 5/16"
Weight:	6 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6' clear suction tube, strainer, weight, mounting bracket and quick start guide
Recommended Accessories:	IPK34, Bypass - part #: MPDI196



MAINTENANCE KITS

Injection Seal Kit (Part #: PJDI120) - For yearly maintenance

Injection Seal Kit for Viscous (Part #: PJDI120V) - For yearly maintenance

Rebuild Kit (Part #: MKD14MZ5) - Extends the life of your Dosatron

Call 800-523-8499 to order the Dosatron for your specific application




DOSATRON®

WATER POWERED DOSING TECHNOLOGY

14 GPM: D14MZ5

Recommended Installation for Industrial Applications

IPK34 - 14 GPM Industrial Plumbing Kit

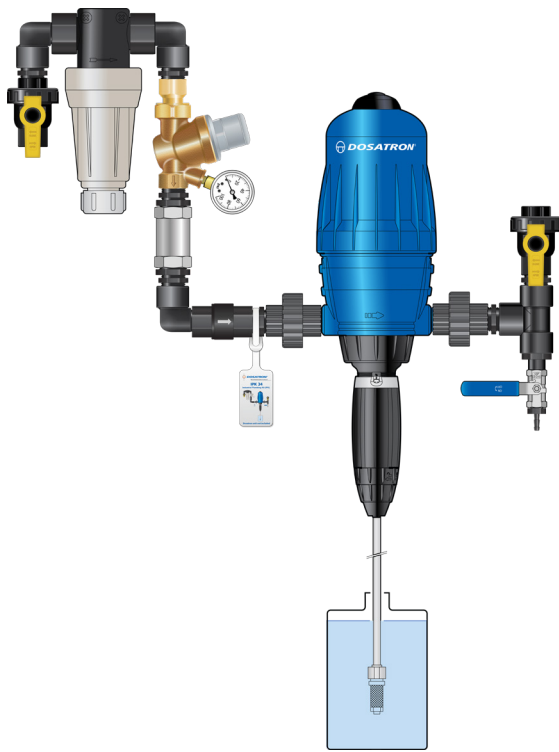

- 3/4" polypropylene single union ball valve
- 1/2" stainless steel ball valve
- 3/4" poly 200 mesh tee filter
- 3/4" brass pressure regulator w/gauge
- 3/4" 14 GPM flow restrictor
- 3/4" polypropylene check valve
- 3/4" union schedule 80 PVC
- 3/4" x 2" polypropylene fittings
- 1/2" x 2" polypropylene fittings
- 1/2" x 1/2" barb fitting
- 3/4" male to 1/2" female reducer bushing
- 3/4" Tee
- 3/4" street elbows
- Roll of thread tape
- Instruction card
- Zip tie

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com

Dosatron International, LLC. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.