

## 40 GPM: D40MZ5

#### PRODUCT DESCRIPTION

The Dosatron **D40MZ5**, with flow up to 40 GPM, can be installed in parallel to increase the water flow. It's water-powered so no electricity is needed, and it's easy to install and maintain. 63% fewer parts, metal free piston.

### **PRODUCT SPECIFICATIONS**

Dilution Range:	1:100 to 1:20 (1% to 5%)
Water Flow Range:	2.2 to 40 GPM
Operating Pressure Range:	7.2 to 116 PSI
Available Housing Materials:	Polypropylene (Standard Blue)
Dimensions:	25 1/4" x 8 1/2"
Weight:	12 lbs
Connection Size:	1 1/2" NPT
Maximum Temperature:	104 <sup>o</sup> F
Included Accessories:	6' clear suction tube, weighted strainer, mounting bracket and operating manual
Recommended Accessories:	200 mesh filter, check valve
Optional Accessories:	Bypass, part #: MPDI196




Injection Seal Kit (Part#: PJDI122V) - For yearly maintenance





# 40 GPM: D40MZ5

### **Recommended Basic Installation**

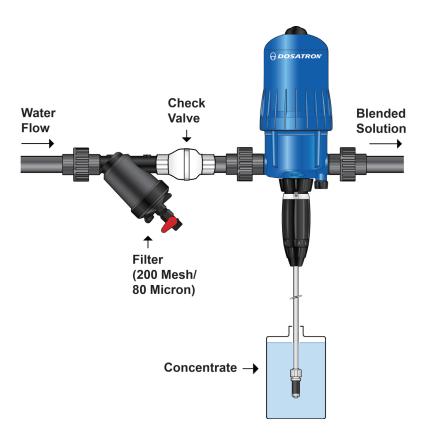

Dosatron International 2090 Sunnydale Blvd. • Clearwater, FL, USA 800-523-8499 • www.dosatronusa.com