



DOSATRON®

WATER POWERED DOSING TECHNOLOGY

14 GPM: D14WL3000NAF

PRODUCT DESCRIPTION

The Dosatron D14WL3000NAF is an NSF/ANSI 61 & 372 Certified, water-powered injector. There is no need for electricity with applications such as water potabilization, water disinfection, or water sanitation.

PRODUCT SPECIFICATIONS

Dilution Range:	1:3000 to 1:333 (0.03% to 0.3%)
Water Flow Range:	0.05 to 14 GPM
Operating Pressure Range:	4.3 to 85 PSI
Available Housing Materials:	Polypropylene (Standard Blue)
Dimensions:	21" x 6 5/16"
Weight:	6 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104° F
Included Accessories:	6' clear suction tube, strainer, weight, mounting bracket and operating manual



Certified to NSF/ANSI 61 & 372

MAINTENANCE KITS

Injection Seal Kit (Part #: PJDI139NAF) - For yearly maintenance

Call 800-523-8499 to order the Dosatron for your specific application




DOSATRON®

WATER POWERED DOSING TECHNOLOGY

14 GPM: D14WL3000NAF

Bypass Installation

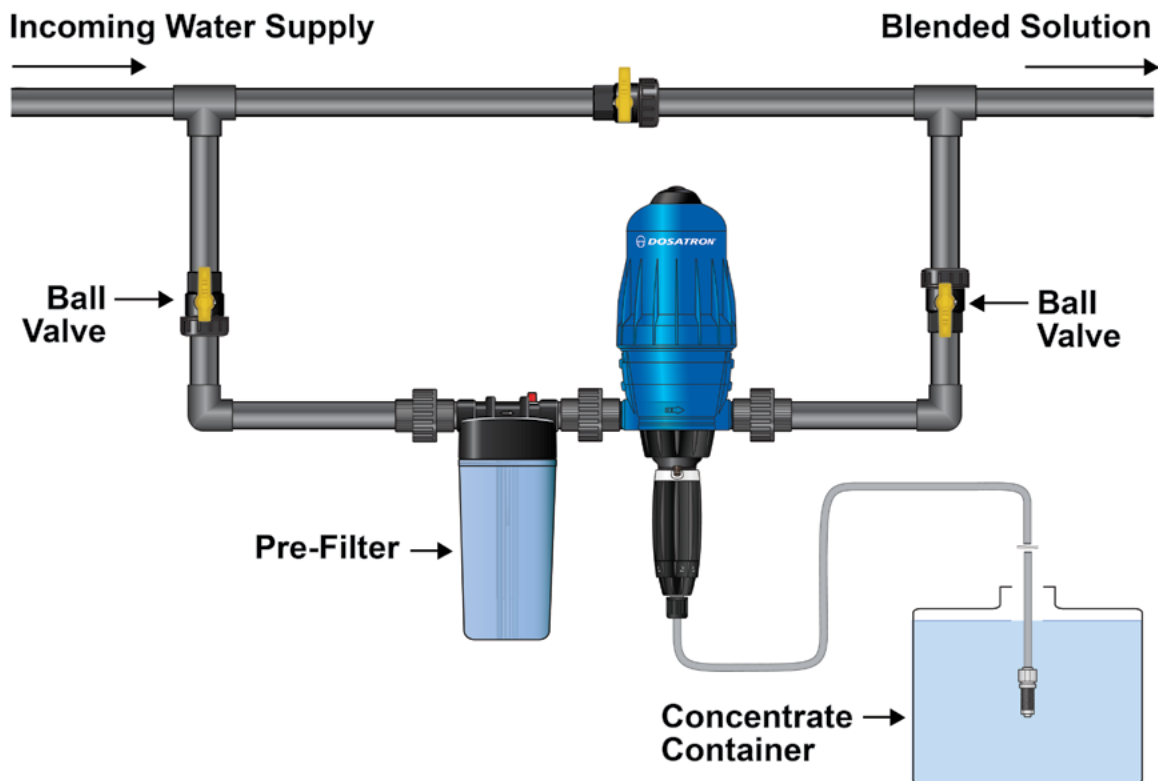

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com

Dosatron International, LLC. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.