



DOSATRON®

WATER POWERED DOSING TECHNOLOGY

40 GPM: D40WL3000NAF

PRODUCT DESCRIPTION

The Dosatron D40WL3000NAF-40 GPM injector is water-powered, along with being NSF/ANSI 61 & 372 Certified. There is no need for electricity with applications such as water potabilization, water disinfection, or water sanitation.

PRODUCT SPECIFICATIONS

| | |
|------------------------------|---|
| Dilution Range: | 1:3000 to 1:800 (0.03% to 0.125%) |
| Water Flow Range: | 2.2 to 40 GPM |
| Operating Pressure Range: | 2.2 to 116 PSI |
| Available Housing Materials: | Polypropylene (Standard Blue) |
| Dimensions: | 25 1/4" x 8 1/2" |
| Weight: | 12 lbs |
| Connection Size: | 1 1/2" NPT |
| Maximum Temperature: | 104° F |
| Included Accessories: | 6' clear suction tube, weighted strainer, mounting bracket and operating manual |



Certified to NSF/ANSI 61 & 372

MAINTENANCE KITS

Injection Seal Kit (Part #: 8PJ075NAF) - For yearly maintenance

Call 800-523-8499 to order the Dosatron for your specific application




DOSATRON®

WATER POWERED DOSING TECHNOLOGY

40 GPM: D40WL3000NAF

Bypass Installation

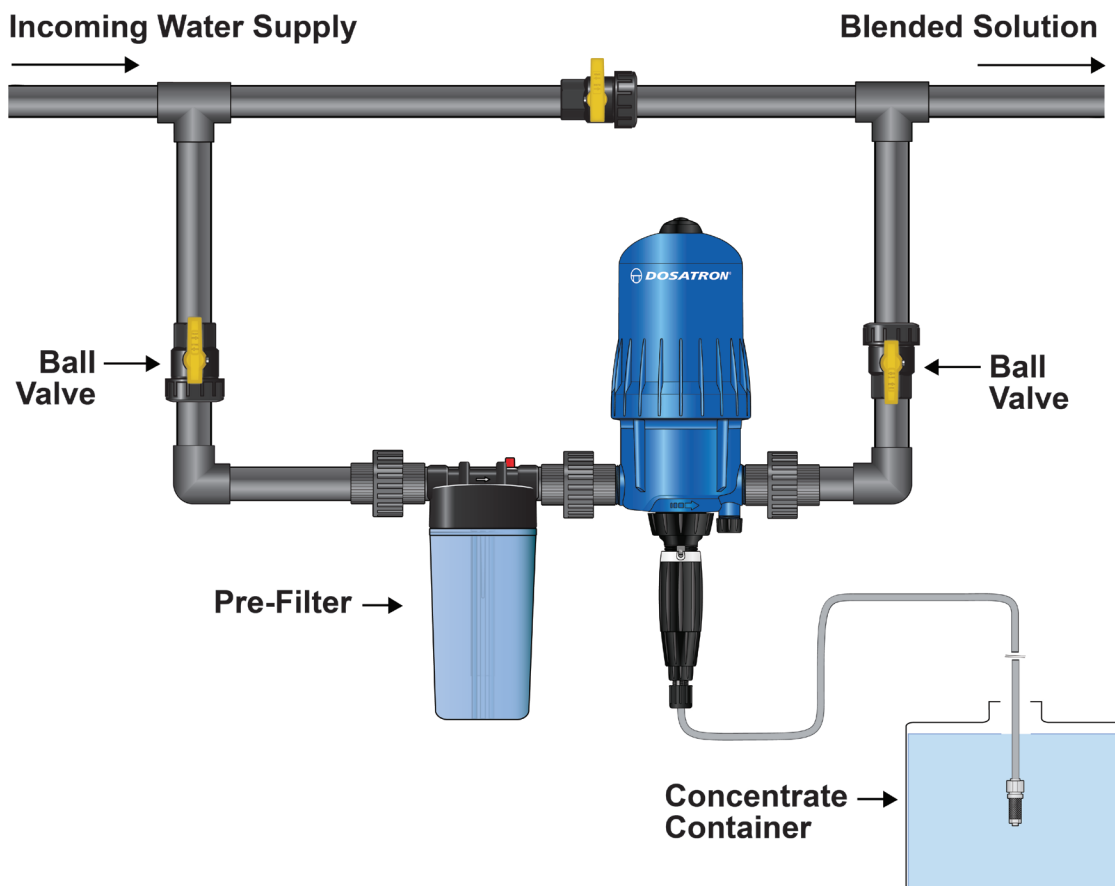

Dosatron International
2090 Sunnydale Blvd. • Clearwater, FL, USA
800-523-8499 • www.dosatronusa.com

Dosatron International, LLC. is an industry leader in water-powered, proportional chemical injectors. Dosatron products are manufactured according to ISO 9001:2000 and ISO 14001:2004 standards.