

11 GPM: D25F

PRODUCT DESCRIPTION

The water-powered Dosatron **D25F-11 GPM** has a fixed rate of 1:128 with a water flow range of 0.05 to 11 GPM. It's a perfect step-up from the D128R when you need higher flow rates.



Dilution Range:	1:128 Fixed (0.8%)
Water Flow Range:	0.05 to 11 GPM
Operating Pressure Range:	4.3 to 85 PSI
Available Housing Materials:	Polyacetal (Standard Blue)PVDF (White)
Dimensions:	14" x 6 1/4"
Weight:	4 lbs
Connection Size:	3/4" NPT
Maximum Temperature:	104 ^o F
Included Accessories:	6' clear suction tube, strainer, weight, mounting bracket and quick start guide
Recommended Accessories:	200 mesh filter, check valve, pressure regulator, flow restrictor

MAINTENANCE KITS


Injection Seal Kit (Part #: **PJ117)** - For yearly maintenance **Rebuild Kit** (Part #: **MKD25F)** - Extends the life of your unit





11 GPM: D25F

Basic Installation

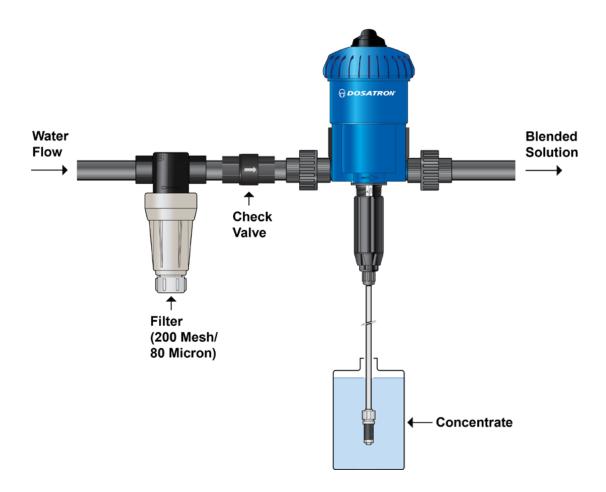

Dosatron International 2090 Sunnydale Blvd. • Clearwater, FL, USA 800-523-8499 • www.dosatronusa.com