

D25 care



The **NEW** standard





The **NEW**
standard

D25+

care



Food compatibility

CE n°1935/2004
CE n°2023/2006.



SmartDosing ready

Compatible with the SmartDosing solution,
a Dosatron innovation.



Improved Chemical Resistance

to most of the drinking-water treatments commonly
used in Animal Health.



Quick locking and coupling systems

Patented systems:
Easier adjustment & locking of the dosing rate.
Easy maintenance of parts and seals (no tools required).




Calibration from 1% to 5%

Possibility to calibrate above 5% and under 1% as defined
by certain Animal Health standards and certifications.



D25+

care

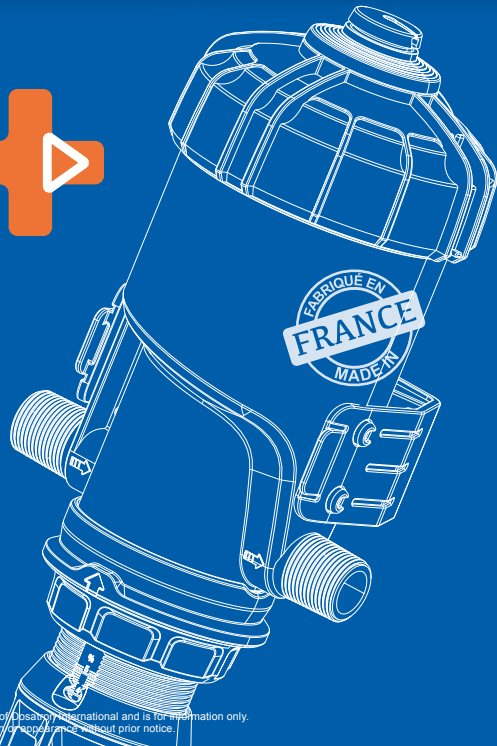

D25AL5N

Operating flow: 10L/h mini - 2,5m³/h maxi
(1/3US Pint/min - 11USGPM)

Maximum operating temperature: 40 °C [104 °F]

Operating pressure:

Bar 0,30 - 6
PSI 4,3 - 85

Injection rate

% 1 - 5

Ratio 1:100 - 1:20

Concentrated additive injection:

Mini L/h - Maxi L/h 0,1 - 125

US Fl. Oz/min - mini 0,056

US GPM - Maxi 0,55

Connections (NPT/BSP gaz male) Ø 20 x 27 mm (3/4")

Hydraulic motor capacity (for every 2 clicks of the piston):

Approx. 0,45L [0,118 US Gallons]

www.dosatron.com

